


Name of the Student: _____

Max. Marks : 20 Marks

Time : 20 Minutes

Q1.

(a) **Figure 1** shows a micrometer screw gauge.

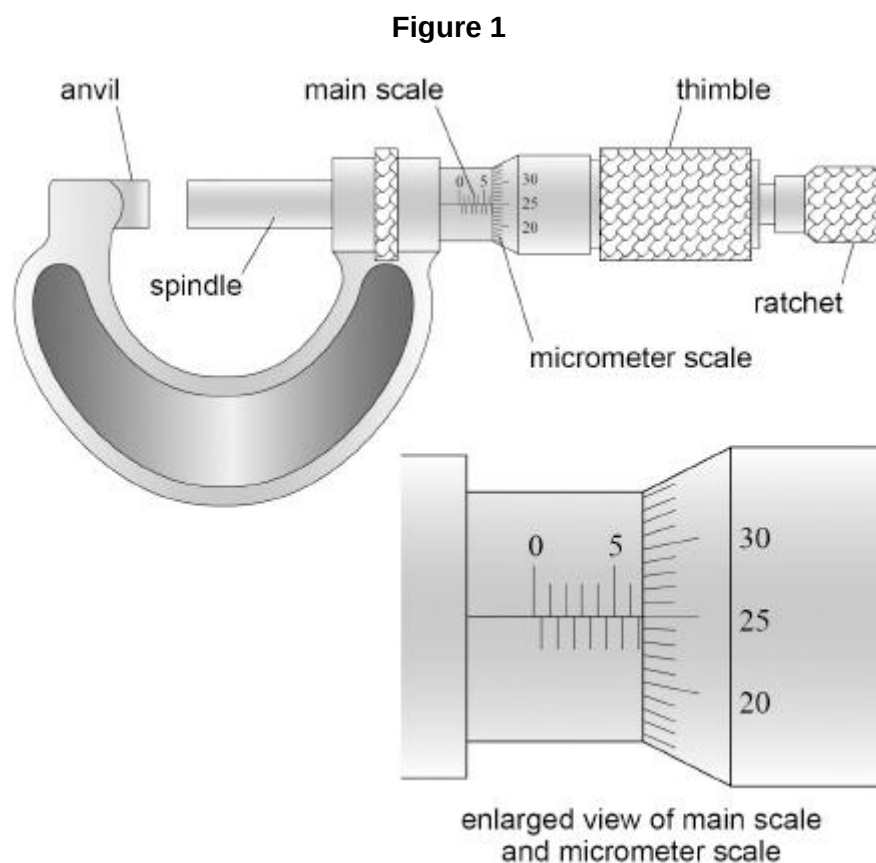

What is the reading on the micrometer?

Tick ✓ **one** box.

6.25

☐

6.75

☐

7.25

☐

8.25

☐

(1)

- (b) A metal wire of diameter d is held in the gap between the anvil and the spindle.
Just before the reading of d is taken, the gap is closed using the ratchet and not the thimble.

Explain why the gap is closed in this way.

(1)

- (c) The mass per unit length μ of the metal wire is given by

$$\mu = \frac{\pi \rho d^2}{4}$$

where ρ is the density of the metal.

Values of d and μ are used to calculate ρ .

The percentage uncertainty in d is 1.2%.

The percentage uncertainty in μ is 2.0%.


Calculate the percentage uncertainty in the result for ρ .

percentage uncertainty = _____ %

(2)

Figure 2 shows apparatus used to investigate how the frequency of stationary waves on a wire depends on its diameter d .

Figure 2

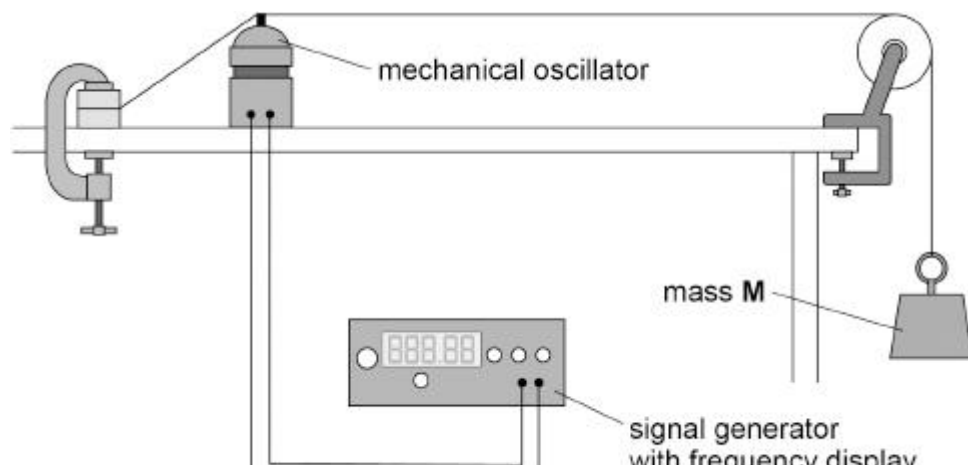

When the signal generator is switched on, the horizontal part of the wire oscillates.

A student changes the frequency until the first-harmonic stationary wave is produced. The student records the frequency f of the first harmonic and then turns off the signal generator. She removes the wire and measures d using a micrometer.

She then repeats the experiment for wires of different diameter.

(d) The wires used in the experiment are made of the same metal so that ρ is a control variable.

State **two** other control variables in the experiment.


1 _____

2 _____

(2)

Figure 3 is a plot of the experimental data.

Figure 3

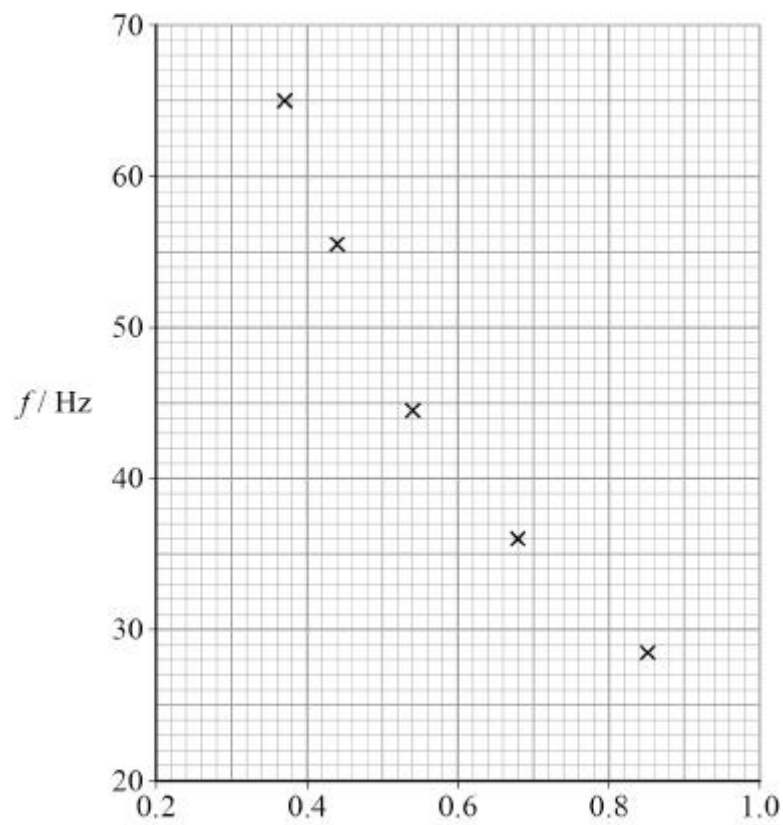

- (e) The student suggests that $f \propto \frac{1}{d}$.

Deduce, using data points from **Figure 3**, whether this suggestion is correct.

(2)


- (f) Another student repeats the experiment with the mass of **M** doubled.

Explain how this student's plotted data compare with **Figure 3**.

(2)

Q2.

Figure 1 shows an arrangement used to investigate projectile motion of a ball.

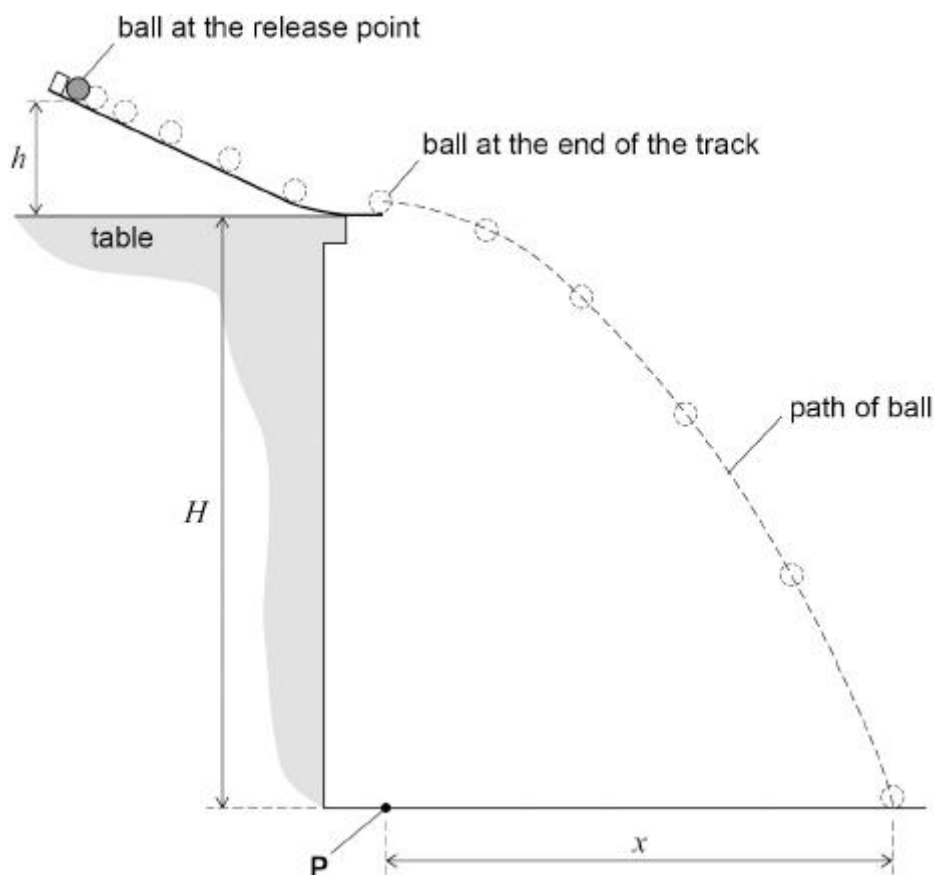Figure 1

The ball is placed on the track at the release point.

The ball is released from rest from a vertical distance h above the table.

When the ball reaches the end of the track, it is a vertical distance H above the horizontal floor.

The ball leaves the track horizontally and lands on the floor at a horizontal distance x from the end of the track.

- (a) To measure x a student must locate a point **P** on the floor vertically below the end of the track.

Describe a procedure to locate **P**.

You may add detail to **Figure 1** to illustrate your answer.


(1)

- (b) A ruler, graduated in mm, is used to determine x .

The student places the ruler on the floor with the zero graduation aligned with **P**.

The student determines x when the ball is released six times at a particular value of h . He makes marks on the floor where the ball lands.

Figure 2 shows circles that indicate these marks.

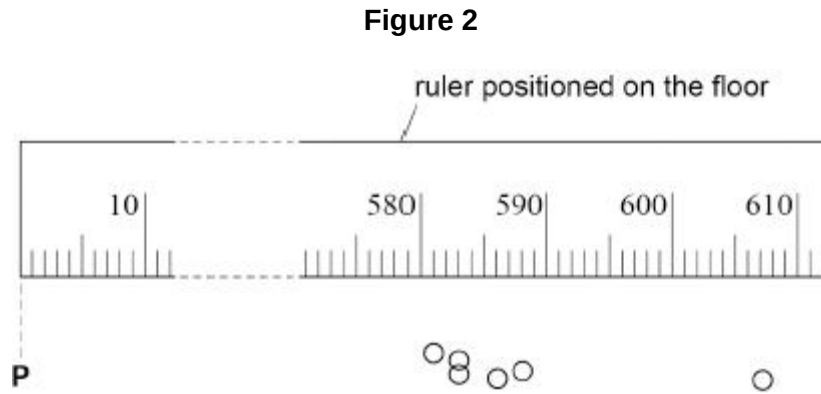

Determine x for this value of h .


$x =$ _____ mm

(3)

- (c) The student obtains values of x corresponding to other values of h .

Figure 3 shows his results.

Figure 3

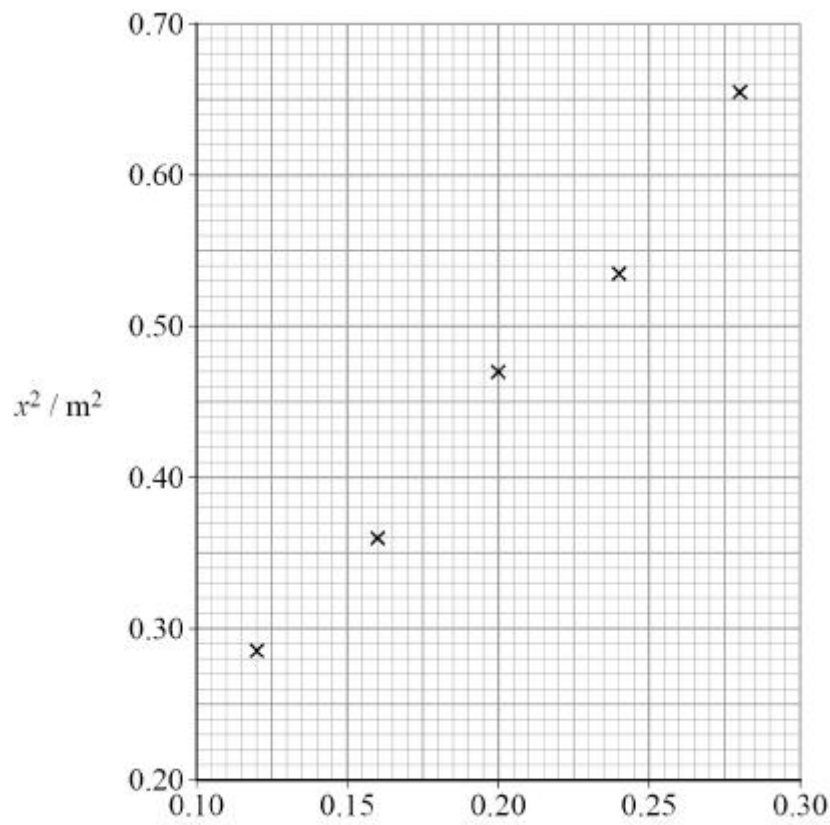


It can be shown that $\frac{x^2}{H} = \frac{20}{7}h$

Determine H .

$$H = \underline{\hspace{2cm}} \text{ m} \quad (3)$$

In a different arrangement, the ball is released from rest and then continues to roll at a constant velocity across a horizontal table, as shown in **Figure 4**.

Figure 4

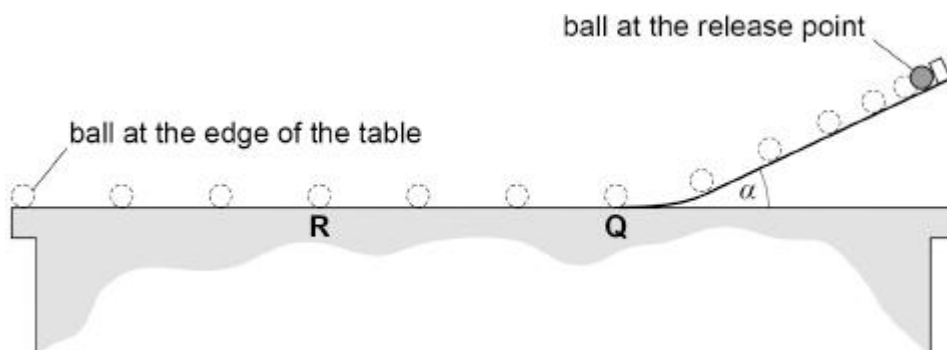

The bottom of the track is fixed to the table at point **Q**.
 The angle between the straight part of the track and the table is α .
 A marker is placed at **R**, a point midway between **Q** and the edge of the table.


The student uses a stopwatch to measure the time t for the ball to roll from **Q** to **R**.

- (d) Explain why increasing the distance **QR** will reduce the percentage uncertainty in t .

(1)

- (e) **Figure 5** shows values of t for different values of α .

Figure 5

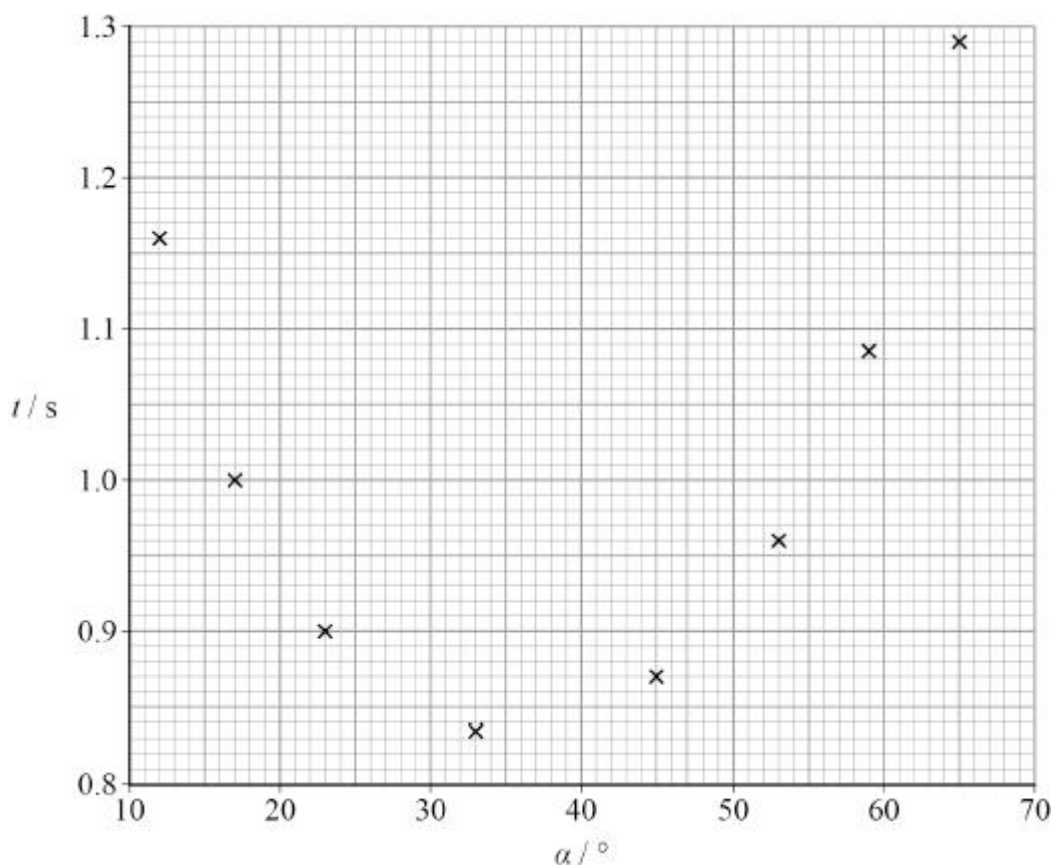

At a particular value of α the ball rolls from **Q** to **R** at its maximum velocity.

Explain how the student should use **Figure 5** to determine this value of α .

Go on to suggest what further readings should be taken to reduce the uncertainty in this value of α .

(2)
(Total 10 marks)